

# AGS-7230-AC-T

Industrial Wireless IoT Gateway, EOT : -30° C ~ 70° C



## FEATURES

- ▶ Built-in 802.11ac/n WiFi uplink for wireless M2M application.
- ▶ Equipped 802.11n/ac 2T2R 5GHz, and 2.4G/5GHz selectable WiFi access point.
- ▶ WiFi Compliance IEEE802.11n/ac 2T2R; Multiple (8) SSIDs for privilege group devices or users.
- ▶ 4\*GE LAN port with tag based and port based VLANs easily to group control and relocate traffic pattern.
- ▶ Equipped with RS232/RS485 interface for Modbus RTU/ASCII and various serial communication protocol, and DI/DO for device triggering or event reporting.
- ▶ Equipped with multi-mode data logging function, which stores the collected logs on attached storage for SCADA telemetry.
- ▶ Equipped with a comprehensive range of protocols, such as NAT, Routing, and IPv6.
- ▶ Featuring various VPN technologies, such as IPSec and OpenVPN, supporting up to 16 concurrent IPSec tunnels with max 100Mbps throughput.
- ▶ Embedded with SPI firewall and IPS function, which prevents from cyber attacks.
- ▶ SNMP, Telnet & SSH via the CLI, and TR-069 for remote management.
- ▶ QoS and Bandwidth management for optimal bandwidth usage.
- ▶ Seamless power failover between redundant DC 12V~48V wide range power input.


## INTRODUCTION

This AGS-7230 series product is loaded with luxuriant security features including VPN, firewall, NAT, port forwarding, DHCP server and many other powerful features for outdoor IP surveillance applications. The redundancy design in fallback 12-48 VDC power terminal.


With built-in 802.11ac/n compliant single band or dual band WiFi module, you just need to find out an available wireless network (or Access Point), and the WiFi VPN Gateway can simply connect to the wireless network and connect your filed devices to the local management center. By VPN tunneling technology, remote sites easily become a part of Intranet, and all data are transmitted in a secure (256-bit AES encryption) link. The feature of DI/DO allows gateway to have real-time response whenever events are detected by sensors.

For wireless M2M (Machine-to-Machine) applications, ANTAIRA Wireless Gateway is absolutely the right choice.

## DIAGRAM

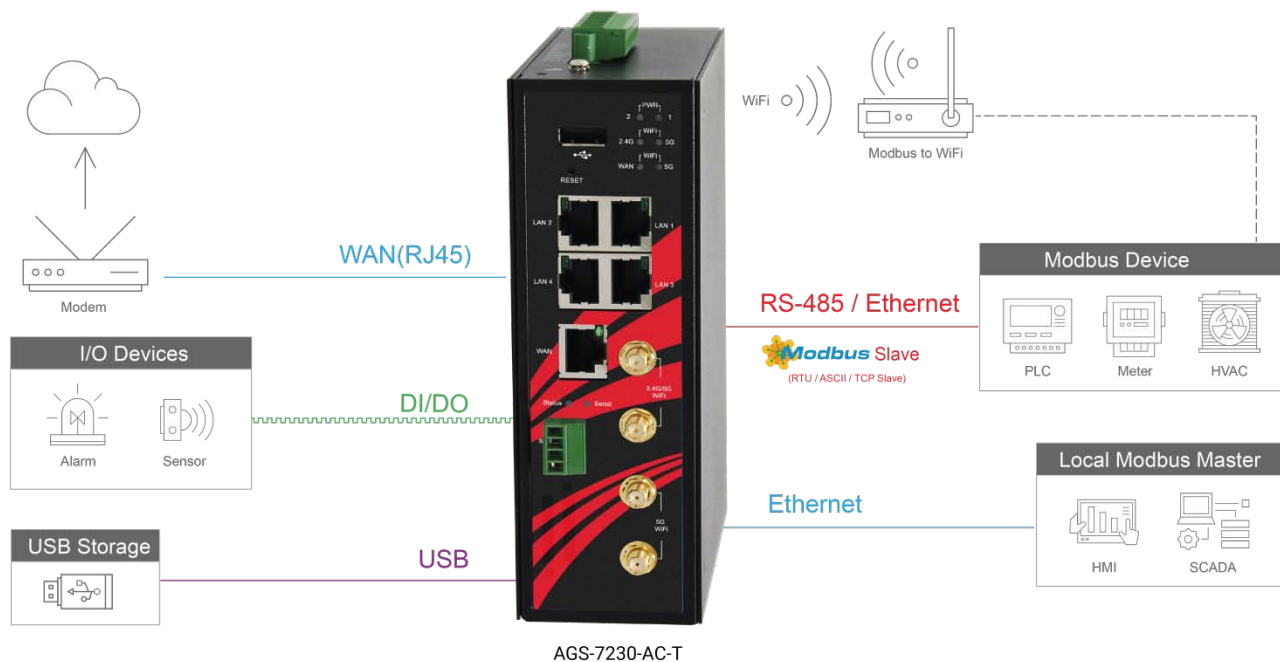

## DIMENSIONS

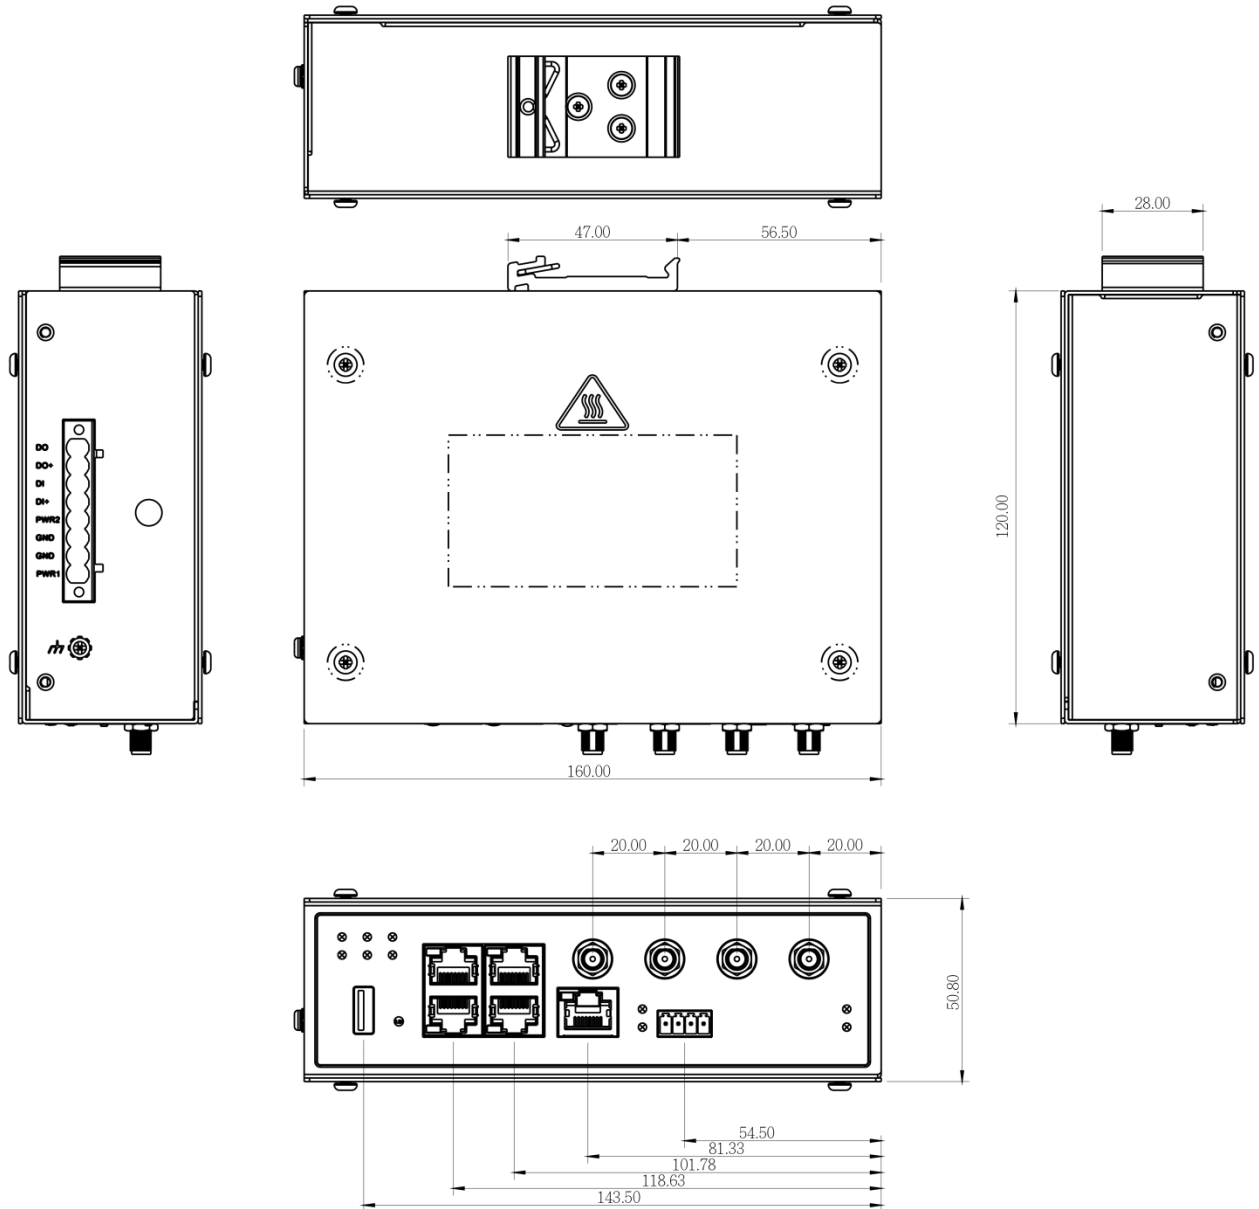

## SPECIFICATIONS



Device Interfaces		Data Logging	Sniffer, Off-line Proxy, Full-time Proxy, Sniffer & Proxy mixed modes
Uplink	11ac (5GHz) and 11n(2.4GHz) WiFi Uplink 1*RJ45 GE (Configurable)	Security	
LAN-RJ45	4*RJ45 GE	VPN Tunneling	IPSec, OpenVPN, Tunneling with Full Tunnel, Tunnel Failover
LAN-WiFi	802.11a/b/g/n/ac 2T2R (2.4G/5GHz selectable)	IPSec Tunnel Scenario	Site to Site, Site to Host, Host to Site, Host to Host
Comm. Bus	1*RS232/RS485 (4-pin Terminal Block)	Firewall	SPI Firewall with Stealth Mode, IPS
I/O	1*DI ("Logic 0": 0~2V, "Logic 1": 5V~30V), 1*DO (Relay Mode, up to 30V / 1A)	Access Control	MAC Control
Log Storage	1*USB 2.0	Service	
Antenna	2*SMA Jack (M) for ext. WiFi Ant. (5GHz) 2*SMA Jack (M) for ext. WiFi Ant. (2.4G/5GHz)	Event Handling	Managing / Notifying Events; DO, SMS, Modbus, Syslog, SNMP Trap(v1/v2c), Email Alert, Remote Host.
Power Source	Dual DC 12V~48V	Administration	
WAN Functions		Config.& Mgmt.	Web, Telnet & SSH via the CLI, SNMP(v1/v2c/v3) & Private MIB
WAN	Multiple WANs, Load Balance, Configurable Ethernet	System Op.	MMI, System Info., System Time / Log, Backup & Restore, Reboot & Reset
WiFi	11ac 2T2R and 11n 2T2R WiFi Uplink	FTP	FTP Server, User Account
Ethernet	Dynamic IP, Static IP, PPPoE, PPTP, L2TP	Diagnostic	Packet Analyzer, Diagnostic Tools
IPv6	Static IPv6, DHCPv6, PPPoEv6	Mechanical Characteristics	
Basic Functions		Housing	Metal, IP30 protection
Ethernet	LAN IP, Subnet Mask	Dimensions	62x125x160mm (w/o mounting kit) 62x135x160mm (with DIN Rail kit)
WiFi Operation	AP Router, WDS only, WDS Hybrid Modes	Weight	1.56 Kg
WiFi Security	WEP, WPA,WPA2, WPA-PSK, WPA2-PSK, 802.1x	Mounting	DIN-Rail Mounting, Wall Mounting
VLAN	Port-based, Tag-based	Environmental Limits	
Port Forwarding	Virtual Server/ Computer, DMZ Host Pass-through: PPTP/L2TP/IPSec	Operation Temp.	-30° C ~ 70° C
Routing	Static and Dynamic: RIPv1/v2, OSPF, and BGP	Storage Temp.	-40° C ~ 85° C
QoS	Policy-based Bandwidth Control and Packet Flow Prioritization	Humidity	10% ~ 95% (non-condensing)
Field Communication			
Virtual COM	RFC2217, TCP Client, TCP Server, UDP		
Modbus	Modbus Gateway for Modbus TCP Master/Slave, Modbus RTU/ASCII Master/Slave Access		

Standards & Regulation		Radio	EN 301 489-1/-7/-17/-24/-52, EN 300 328 V2.1.1 EN 301 893 V1.8.1, EN 50385
EMI	EN 55032: 2015 +AC: 2016 Class B EN 61000-3-2:2014 EN 61000-3-3:2013		
EMS	EN 55024:2010+A1:2015 EN 61000-6-2:2005+AC:2005 IEC 61000-4-2(ESD) Level 4 IEC 61000-4-3(RS) Level 3 IEC 61000-4-4(EFT) Level 4 IEC 61000-4-5(Surge) Level 3 IEC 61000-4-6(CS) Level 3 IEC 61000-4-8(PFMF) Level 4	Safety	EN 60950-1
		Certification	
		Approval / Certificate	CE / FCC
		Warranty	5 years
		Notes	
		<ol style="list-style-type: none"> <li>Specifications are subject to change without prior notice.</li> <li>Supported cellular frequency depends on regional hardware version.</li> </ol>	

## ORDERING INFO

Model Name	Product Description
AGS-7230-AC-T	Industrial Wireless IoT Gateway, EOT : -30° C ~ 70° C, including 5GHz antenna*2 & 2.4G/5GHz antenna*2
Optional Accessories	
HDR-60-24	60W Industrial Din Rail Power Supply, 24VDC
NDR-75-12	75W Industrial Din Rail Power Supply, 12VDC