

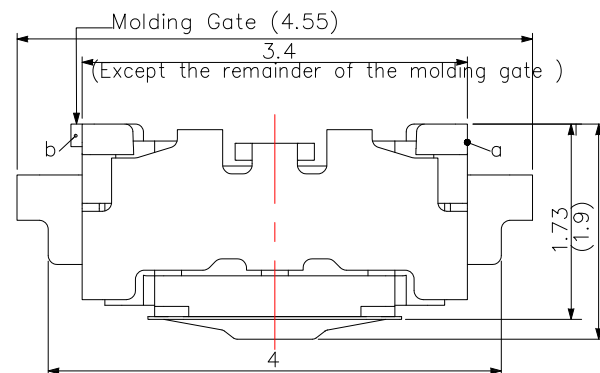





CIRCUIT DIAGRAM

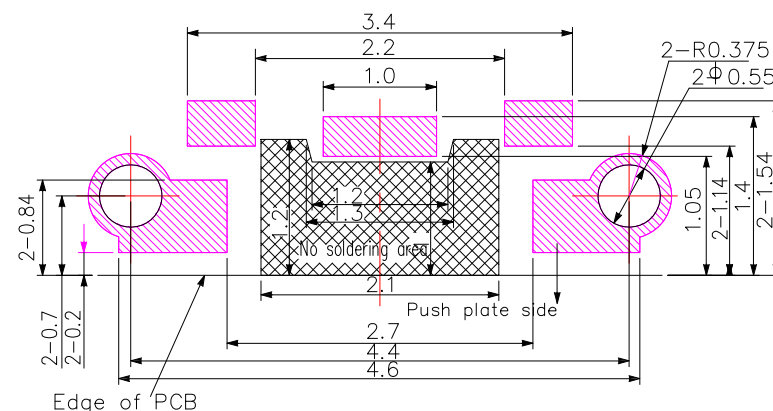

PCB LAYOUT

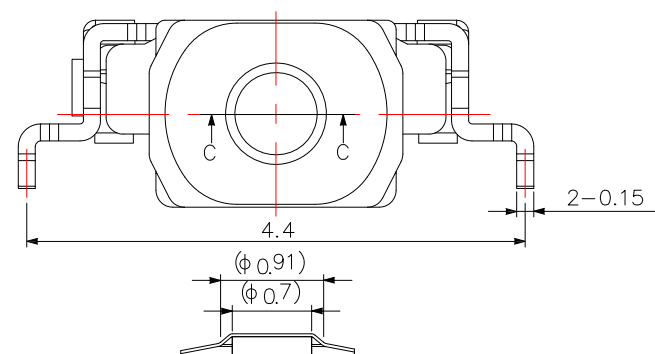

Actuator cross section (Section C-C)

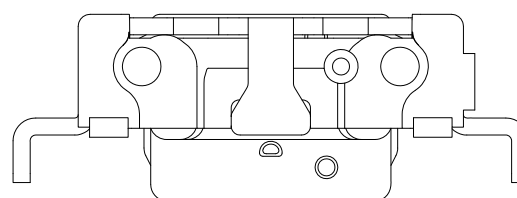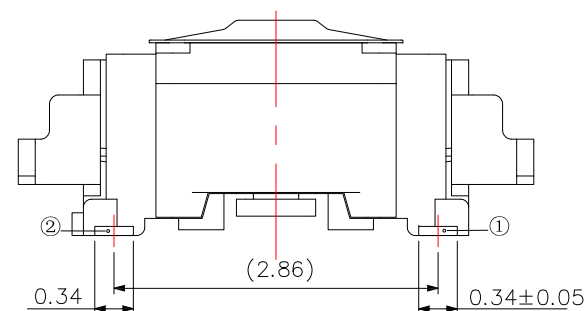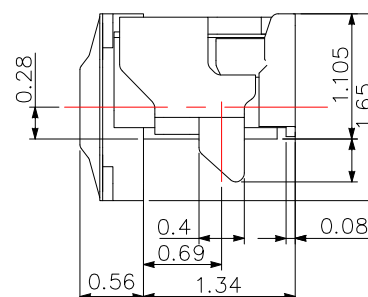

<Back View>

SPECIFICATIONS

Rating	DC 15V 20mA.				
Insulation Resistance	50 MΩ Min.				
Contact Resistance	500 mΩ Max.				
Dielectric Withstanding Voltage	AC 250V for 1 min				
Operating Force	0	100 ± 30gf	2	160 ± 50gf	3 240 ± 50gf
Operating Life (cycles)	500,000				



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/04/20
DATE: 12/04/20
DATE: 12/04/20

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE: TACT SWITCH
DWG NO.: TS-A99-x-S182
PART NO.: TS-A99-x-S182

SIZE: A4
VER: R