

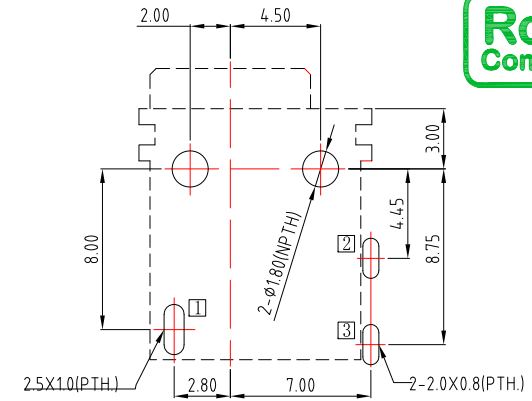
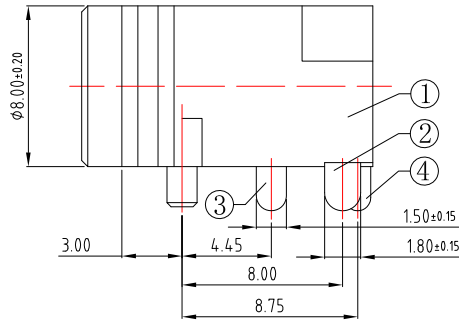
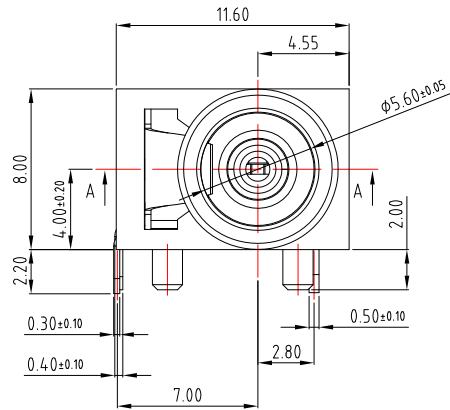



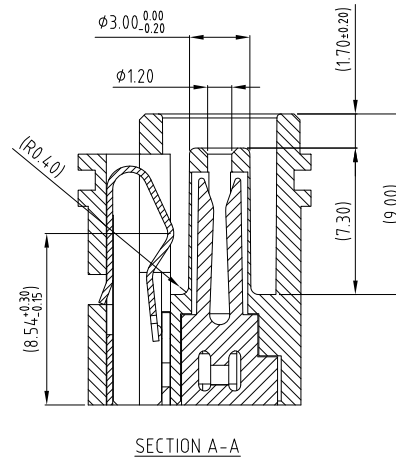

P.C.B LAYOUT
TOP VIEW

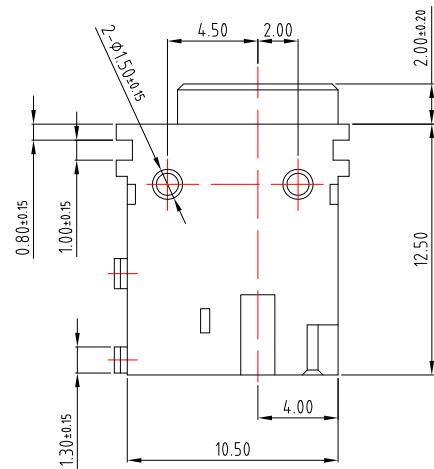

Circuit Diagram □:Terminal No.

SPECIFICATION

- 1.Rating : DC 20V , 5.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

④	Shunt terminal	③	1	C2680	Tin or Silver plating
③	Tip spring	②	1	C5210	Tin or Silver plating
②	Center pin	①	1	C2680	Tin or Silver plating
①	Housing		1	PA9T or PBT	Black
NO.	DESCRIPTION	Q' TY	MATERIAL	REMARK	

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	11/28/19			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK DIP TYPE
Jacky Chen	11/28/19			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-D800-1.2-S214
Tony Kao	11/28/19	1 : 1		
		SHEET NO.	PART NO.	DC-D800-1.2-S214

SIZE
A4
VER
R