
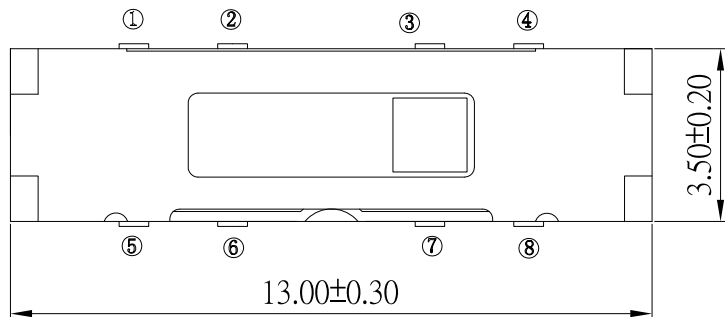


CIRCUIT DIAGRAM


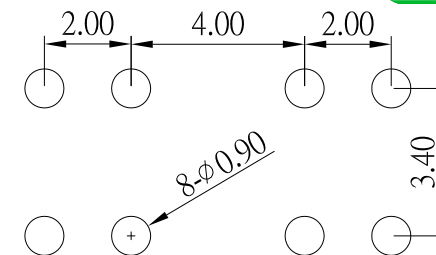


P.C.B LAND PATTERN

MODEL NO.	KNOB(X)
SS-F36	2.0 mm
SS-F36A	4.0 mm

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	100M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	230 $\pm$ 70gf
Operating Life	10,000 cycles

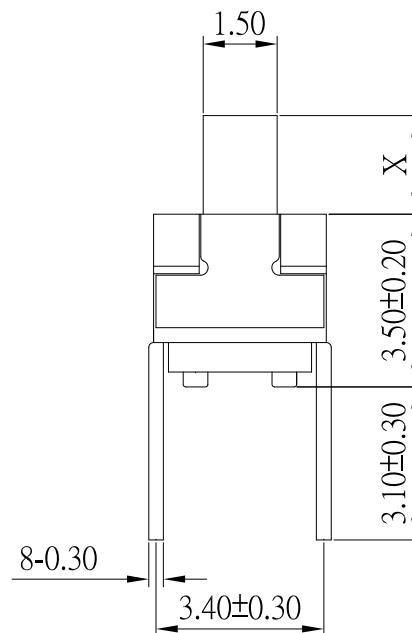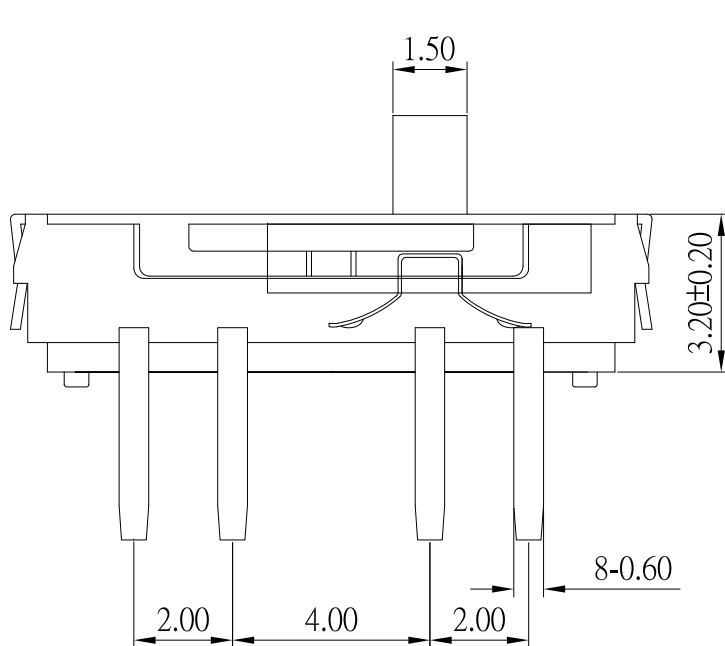

E	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	STAINLESS STEEL	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	更新材質	Jack	121521	建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 $\pm$ 0.2 Above 5 ~ 15 $\pm$ 0.3 Above 15 ~ 30 $\pm$ 0.4 Above 30 ~ 50 $\pm$ 0.5 Angle $\pm$ 0.3° 3RD. ANGEL'S  UNITS MM
4	更新圖面	Jack	011421	
3	更新CIRCUIT DIAGRAM	Jack	120618	
2	更新為A0版	Jack	021517	
1	更新材質	Jack	011817	
ITEM NO.	DESCRIPTION	DRAWN	DATE	

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/15/21			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Jacky Chen	12/15/21			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-F36x-B-S246
Tony Kao	12/15/21	1 : 1		
		SHEET NO.	PART NO.	SS-F36x-B-S246
		1 of 1		